
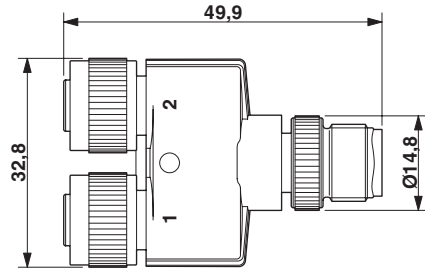


New

Y distributor

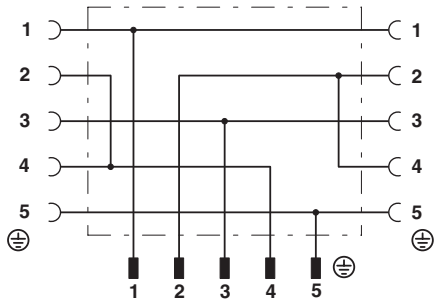

Part number: 22260600

장점

- 신속하고 용이한 설치로 인한 비용절감
- 컴팩트한 크기로 공간 절약
- 빠르고 쉬운 에러 트래킹
- 표준화된 인터페이스

응용반경

- 자동차 기술
- 기계 엔지니어링
- 공장 엔지니어링

- 도구 상점
- 자동차 산업

제품개요

- M12 와 M8과 같이 디자인
- 나사절삭 구멍이 있는 M12 디자인
- 페인트나 바니쉬로 가릴 수 있는 물질 없음

승인(규범 참고 자료)



Technical data

<b>IP</b>	<b>Degree of protection</b> IP65/IP67
<b>0+/-</b>	<b>Ambient temperature (operation)</b> Plug/socket -25 °C to +90 °C
	<b>Contact material</b> CuZn
	<b>Contact surface material</b> Ni/Au
	<b>Coding</b> A - Standard
	<b>Material, knurls</b> Zinc die-cast, (nickel-plated)
	<b>Material of grip body</b> TPU, hardly inflammable, self-extinguishing

Part number	Article designation	Nominal voltage U <sub>N</sub> in V	Nominal current I <sub>N</sub> in A	Number of poles	PU
<b>M12 connector Y distributor on 2x bridged M12 socket</b>					
22260600	AB-C3-M12Y-2XM12FS B E	60	4	5	5
<b>M12 connector Y distributor on 2x M12 socket</b>					
22260601	AB-C3-M12Y-2XM12FS E	60	4	4	5
<b>M12 connector Y distributor on 2x parallel M12 socket</b>					
22260602	AB-C5-M12Y-2XM12FS V	60	4	5	5
<b>M8 connector Y distributor on 2x M8 socket</b>					
22260603	AB-C3-M8Y-2XM8FS	30	3	3	5
<b>M8 connector Y distributor 2x parallel M8 socket</b>					
22260604	AB-C3-M8Y-2XM8FS V	60	3	3	5

Note: Tabular value 'Number of poles' is valid for sockets  
 For detailed information please see the data sheet (www.lappautomation.com)