
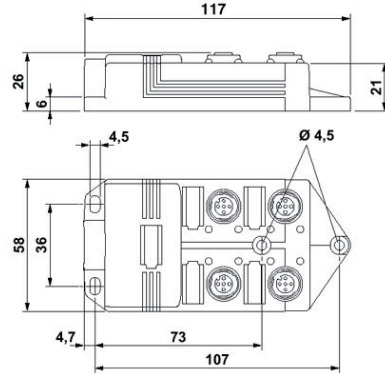


New

S/A box with M12 slots and master cable

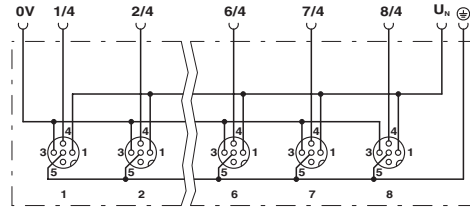

Part number: 22260010

장점

- 저렴하고 효율적인 센서와 액츄에이터 배선
- 수많은 개별도체 대신 하나의 마스터케이블이 제어 유닛에 놓임.
- 마스터 케이블은 신호와 전원을 전달하는 하이브리드 케이블로 설계됨.
- 마스터 케이블은 선 조립 되어있으므로 별도의 조립비용이 들지 않음.

- 단일 또는 이중 센서/액츄에이터 박스
- LED가 배전기의 작동모드와 센서의 상태를 알려줌
- 페인트나 바니쉬로 가릴 수 있는 물질 없음

승인(규범 참고 자료)



응용반경

- 자동화 기술
- 기계 엔지니어링
- 공장 엔지니어링
- 도구 상점
- 자동차 산업

디자인

- PUR/PVC 케이블
- 영구적으로 유연한 제어 케이블
- 외피 색상 : 검정

적합한 도구

- 요청시 적합한 도구 판매가능
(예 : orque 스크류 드라이버 M12)

제품개요

- 영구적으로 연결된 마스터 케이블

Technical data



Degree of protection
IP65 / IP67 / IP69K



Max. current carrying capacity per path
2 A



Current carrying capacity per slot
4 A

Part number	Article designation	Length in m	Number of slots	Nominal voltage U _n in V	SACB total current in A	Status display	PU
Single occupied boxes, without LEDs							
22260010	AB-B4-M12-4-5,0PUR	5.0	4	120	12	No	1
22260011	AB-B4-M12-4-10,0PUR	10.0	4	120	12	No	1
22260014	AB-B8-M12-8-5,0PUR	5.0	8	120	12	No	1
22260015	AB-B8-M12-8-10,0PUR	10.0	8	120	12	No	1
Single occupied boxes, with LEDs							
22260018	AB-B4-M12L-4-5,0PUR	5.0	4	24	12	LEDs	1
22260019	AB-B4-M12L-4-10,0PUR	10.0	4	24	12	LEDs	1
22260022	AB-B8-M12L-8-5,0PUR	5.0	8	24	12	LEDs	1
22260023	AB-B8-M12L-8-10,0PUR	10.0	8	24	12	LEDs	1
Double occupied boxes, without LEDs							
22260012	AB-B4-M12-8-5,0PUR	5.0	4	120	12	No	1
22260013	AB-B4-M12-8-10,0PUR	10.0	4	120	12	No	1
22260016	AB-B8-M12-16-5,0PUR	5.0	8	120	12	No	1
22260017	AB-B8-M12-16-10,0PUR	10.0	8	120	12	No	1
Double occupied boxes, with LEDs							
22260020	AB-B4-M12L-8-5,0PUR	5.0	4	24	12	LEDs	1
22260021	AB-B4-M12L-8-10,0PUR	10.0	4	24	12	LEDs	1
22260024	AB-B8-M12L-16-5,0PUR	5.0	8	24	12	LEDs	1
22260025	AB-B8-M12L-16-10,0PUR	10.0	8	24	12	LEDs	1

Copper price basis: including; For utilization and definition of 'Metal price basis' and 'Metal index' see Appendix T17
Unused female connectors must be covered with protective caps (see accessories) to ensure IP65/67
For detailed information please see the data sheet (www.lappautomation.com)

Accessories

- Screw plug for unoccupied sockets see page 363