



New

S/A M12 connectors that can be assembled

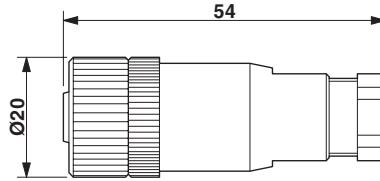

Part number: 22260127

장점

- 빠르고 쉬운 현장 조립
- 개별 케이블 길이를 생성할 수 있음
- 표준화된 인터페이스
- 케이블 연결에 별도의 특수도구가 필요하지 않음 (빠른 연결 설계)

응용반경

- 자동화 기술
- 기계 엔지니어링
- 공장 엔지니어링
- 도구 상점
- 자동차 산업

제품개요

- 4, 5, 8 포지션 버전
- 실드 / 비실드 버전
- 빠른 연결 및 스크류 연결 설계
- 페인트나 바니쉬로 가릴 수 있는 물질 없음

승인(규범 참고 자료)



적합한 케이블

- 센서 / 액추에이터 부품을 위한 케이블 : 366 페이지

Technical data

IP	Degree of protection IP 67
0+T	Ambient temperature (operation) Plug / socket -40 °C to +85 °C
	Contact material CuZn
	Contact surface material CuSnZn
	Coding A - Standard

Part number	Article designation	Number of poles	Conductor cross section stranded min. in mm ²	Conductor cross section stranded max. in mm ²	Cable Diameter min in mm	Cable Diameter max in mm	Nominal voltage U _N in V	Nominal current I _N in A	PU
Straight connector, fast connection (Insulation-displacement)									
22260132	AB-C4-M12MS-F0,34	4	0.14	0.34	3.5	6	125	4	1
22260134	AB-C4-M12MS-F0,75	4	0.34	0.75	4	8	250	4	1
Straight connector, screw connection									
22260129	AB-C5-M12MS-PG 7	5	0.25	0.75	4	6	60	4	1
Straight socket, fast connection (Insulation-displacement)									
22260131	AB-C4-M12FS-F0,34	4	0.14	0.34	3.5	6	125	4	1
22260133	AB-C4-M12FS-F0,75	4	0.34	0.75	4	8	250	4	1
Straight socket, screw connection									
22260127	AB-C5-M12FS-PG 7	5	0.25	0.75	4	6	60	4	1
Angled connector, screw connection									
22260130	AB-C5-M12MA-PG 7	5	0.25	0.75	4	6	60	4	1
Angled socket, screw connection									
22260128	AB-C5-M12FA-PG 7	5	0.25	0.75	4	6	60	4	1
Straight connector, shielded, screw connection									
22260135	AB-C5-M12MS-PG9-SH	5	0.25	0.75	6	8	60	4	1
22260825	AB-C8-M12MS-PG9-SH	8	0.25	0.75	6	8	30	2	1
Straight socket, shielded, screw connection									
22260136	AB-C5-M12FS-PG9-SH	5	0.25	0.75	6	8	60	4	1
22260826	AB-C8-M12FS-PG9-SH	8	0.25	0.75	6	8	30	2	1

For detailed information please see the data sheet (www.lappautomation.com)