


New

S/A M12 flush-type connectors with PG9 fastening thread

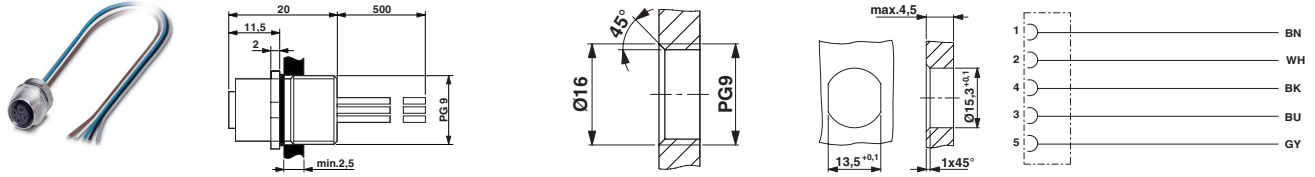

Part number: 22260114

장점

- 개별 장치 컨셉에 맞는 유연한 연결 솔루션
- 장치에 간단하게 설치
- 표준화된 인터페이스

응용반경

- 자동차 기술
- 기계 엔지니어링
- 공장 엔지니어링
- 도구 상점
- 자동차 산업

제품개요

- M12 패널에 맞는 편칭된 단일 리츠 선
- 패널이 PG9 잠금선에 맞음
- 전면 또는 후면 고정 모델
- 페인트나 바니쉬로 가릴 수 있는 물질 없음

승인(규범 참고 자료)



디자인

- PUR 할로겐 프리 단일 리츠 선, l = 0,5 m
- 0,34 mm²

Technical data

IP	Degree of protection IP 67
	Ambient temperature (operation) Plug/socket -25°C to +85°C
	Contact material CuZn
	Contact surface material Au
	Coding A - Standard

Part number	Article designation	Number of poles	Conductor cross section in mm ²	Nominal voltage U _N in V	Nominal current I _N in A	PU
M12 flush-type connector pin for rear mounting						
22260117	AB-C4-DSI-M12MS-PG9-0,5	4	0.34	250	4	1
22260115	AB-C5-DSI-M12MS-PG9-0,5	5	0.34	60	4	1
M12 flush-type connector socket for rear mounting						
22260118	AB-C4-DSI-M12FS-PG9-0,5	4	0.34	250	4	1
22260116	AB-C5-DSI-M12FS-PG9-0,5	5	0.34	60	4	1
M12 flush-type connector pin for front mounting						
22260113	AB-C4-M12MS-PG9-0,5	4	0.34	250	4	1
22260112	AB-C5-M12MS-PG9-0,5	5	0.34	60	4	1
M12 flush-type connector socket for front mounting						
22260114	AB-C4-M12FS-PG9-0,5	4	0.34	250	4	1
22260111	AB-C5-M12FS-PG9-0,5	5	0.34	60	4	1

Copper price basis: including; For utilization and definition of ‚Metal price basis‘ and ‚Metal index‘ see Appendix T17
For detailed information please see the data sheet (www.lappautomation.com)