


New

M 16 socket with connected master cable

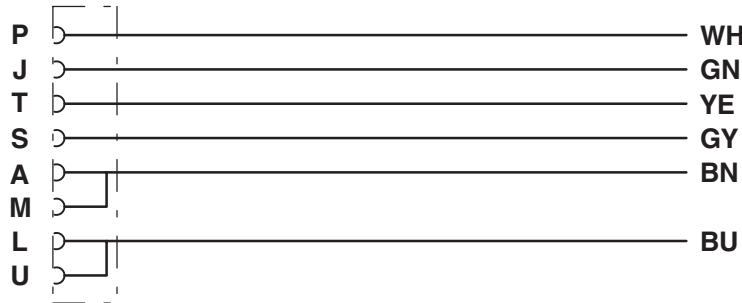

Part number: 22260607

장점

- 4에서 10개의 슬롯이 있는 M8 박스를 위한 연결 케이블
- M16 연결.

응용환경

- 자동화 기술
- 기계 엔지니어링
- 공장 엔지니어링
- 도구 상점
- 자동차 산업

제품개요

- M16 선에 연결된 이형 소켓으로 설계
- 페인트나 바니쉬로 가릴 수 있는 물질 없음

승인(규범 참고 자료)



디자인

- PUR/PVC 케이블
- 영구적으로 유연한 제어 케이블
- 외피 색상 : 검정

Technical data

IP	Degree of protection IP 67
0+T	Ambient temperature (operation) Plug/socket -25 °C to +90 °C Cable, fixed installation -40 °C up to +90 °C Cable, flexible installation -5 °C up to 80 °C
	Contact material CuZn
	Contact surface material Ni/Au
	Coding A - Standard
	Material, knurls Nickel-plated brass
	Material of grip body TPU, hardly inflammable, self-extinguishing

Part number	Article designation	Length in m	Nominal voltage U_n in V	Nominal current I_n in A	PU
8 pole angled socket					
22260607	AB-C8- 5,0PUR-M16FA	5	125	4	1
22260608	AB-C8-10,0PUR-M16FA	10	125	4	1
10 pole angled socket					
22260609	AB-C10- 5,0PUR-M16FA	5	125	4	1
22260610	AB-C10-10,0PUR-M16FA	10	125	4	1
12 pole angled socket					
22260611	AB-C12- 5,0PUR-M16FA	5	125	4	1
22260612	AB-C12-10,0PUR-M16FA	10	125	4	1
14 pole angled socket					
22260613	AB-C14- 5,0PUR-M16FA	5	125	4	1
22260614	AB-C14-10,0PUR-M16FA	10	125	4	1

Copper price basis: including; For utilization and definition of ‚Metal price basis‘ and ‚Metal index‘ see Appendix T17

Special cable length on request

For detailed information please see the data sheet (www.lappautomation.com)