


**Cablefix**

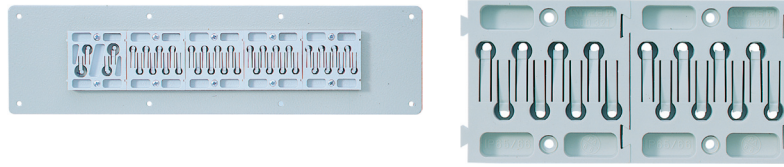

**Benefits**

- Time-saving assembly
- High packing density
- Strain relief closes automatically when the cable is pushed through
- For repairs, maintenance or upgrades, the individual cables can easily be detached with the spring clamp and replaced

**Application range**

- Housing opening for connecting sensor/actuator cables and bus cables.

**Approvals (Norm references)**



**Note**

- Implementation of cables only possible if not harnessed (without connectors).

**Scope of delivery**

- Including blind plugs, if not fully occupied

**Technical data**

- Material**  
Flange: PA 6.6  
Seal: SBR/NBR 45
- Degree of protection**  
IP 55

Part number	Part designation / size	Number of cables x Cable Ø	Cut-out W x H	Dimension: L x W x H in mm	Pieces / PU
<b>Sensor/actuator flange (S/A)</b>					
62130000	1 x S/A	8 x 3,8 - 6,3	46.0 x 46.0	50 x 50 x 10	5
62130010	2 x S/A	16 x 3,8 - 6,3	96.0 x 46.0	2 x (50 x 50 x 10)	10
<b>Bus/Vcc flange (B/V) + sensor/actuator flange (S/A)</b>					
62130070	1 x B/V	2 x 6,1 - 8,8 + 2 x 7,8 - 10,7	46.0 x 46.0	50 x 50 x 10	5
62130080	1 x B/V + 1 x S/A	2 x 6,1 - 8,8 + 2 x 7,8 - 10,7 + 8 x 3,8 - 6,3	96.0 x 46.0	2 x (50 x 50 x 10)	10

ÖLFLEX®  
 UNITRONIC®  
 ETHERLINE®  
 HITRONIC®  
 EPIC®  
 SKINTOP®  
 SILVYN®  
 FLEXIMARK®  
 ACCESSORIES  
 APPENDIX