


**SKINDICHT® SR-SV-M**

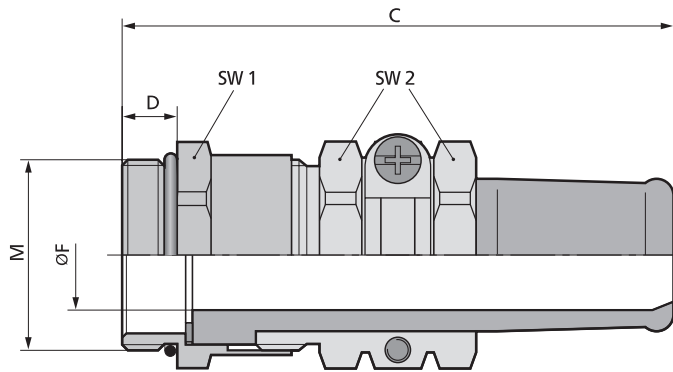

SKINDICHT® SR-SV-M

**Benefits**

- For high temperatures
- Resistant against oils, solvents, acids and chemicals
- Seawater-resistant
- High strain relief
- Robust

**Application range**

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Special cable gland with VITON® antikink sleeve. Our own reinforced acid-resistant VITON® receptacle does not show an aging effect even after a long usage period at a temperature of +165°C.
- Machine and turbine manufacturing
- Plant construction
- Laboratory

**Approvals (Norm references)**



**Design**

- Metric connection thread acc. to EN 50262

**Note**

- Counter nut to be used SKINDICHT® SM-M
- EMC type on request

**Technical data**

**Caution**  
Installation dimensions see Appendix T21

**Material**  
Body: Nickel plated brass  
O-ring: FKM  
Antikink protection: FKM

**Degree of protection**  
IP 65

**Range of temperature**  
-15°C up to +165°C

Part number	Part designation / size	Clamping range ØF mm	Max. fitting size for installation in mm	Function thread PG	SW1 / SW2 mm	Overall length C mm	Thread length D mm	Clear opening F mm	Pieces / PU
<b>SKINDICHT® SR-SV-M</b>									
52105820	20 x 1,5	5.5 - 7	28	11.0	22 / 20	56.0	6.0	7	25
52105830	20 x 1,5	7.5 - 9	28	11.0	22 / 20	56.0	6.0	9	25
52105840	20 x 1,5	7.5 - 9	32	13.5	22 / 22	61.5	6.0	9	25
52105850	20 x 1,5	8.5 - 11	32	13.5	22 / 22	61.5	6.0	11	25
52105860	20 x 1,5	10.5 - 13	32	13.5	22 / 22	61.5	6.0	13	25
52105870	20 x 1,5	11 - 13	35	16.0	24 / 24	66.5	6.0	13	10
52105880	20 x 1,5	12 - 15	35	16.0	24 / 24	66.5	6.0	15	10
52105890	25 x 1,5	13.5 - 15	40	21.0	30 / 30	79.0	7.0	15	10
52105900	25 x 1,5	15.5 - 17	46	21.0	30 / 30	79.0	7.0	17	10
52105910	25 x 1,5	16.5 - 19	46	21.0	30 / 30	79.0	7.0	19	10

Viton® is a registered trademark of DuPont de Nemours