


New

SKINTOP® COLD / SKINTOP® COLD-R

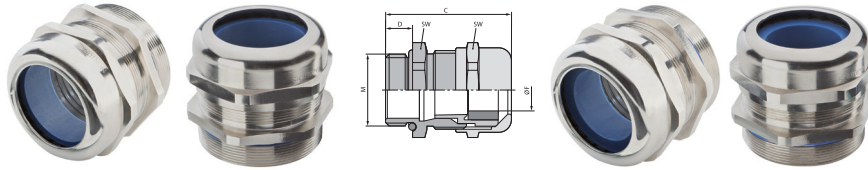

SKINTOP® COLD

SKINTOP® COLD-R



Info

- For extreme negative temperatures

■ **Benefits**

SKINTOP® COLD

- Increased cold resistant
- Dynamic strain stability
- High mechanic stability
- Optimal strain relief
- Large, variable clamping ranges

SKINTOP® COLD-R

- Benefits see SKINTOP® COLD

■ **Application range**

SKINTOP® COLD

- In areas with high demand on special mechanical stability and cold resistance.
- Air conditioning technology
- Freezing plants, cold stores
- Off shore
- Plant engineering

SKINTOP® COLD-R

- With reducing seal insert, to seal cables with smaller outer diameters.

■ **Approvals (Norm references)**



■ **Design**

- Metric connection thread acc. to EN 50262

■ **Note**

- Counter nut to be used SKINDICHT® SM-M
- For suitable accessories see SKINTOP® metric accessories

■ **Technical data**



Caution

Installation dimensions and tightening torques see Appendix T21



Material

Body: Nickel plated brass
Insert: Special Polyamide
Seal: Silicone
O-ring: Silicone



Degree of protection

IP 68 - 10 bar



Range of temperature

-70 °C up to +100 °C

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® COLD						
53113500	12 x 1,5	3-7	16	26.5	6.5	100
53113510	16 x 1,5	4,5-10	20	32.0	7.0	100
53113520	20 x 1,5	7-13	24	35.5	8.0	50
53113530	25 x 1,5	9-17	29	37.5	8.0	25
53113540	32 x 1,5	11-21	36	42.2	9.0	25
53113550	40 x 1,5	19-28	45	49.5	9.0	10
53113560	50 x 1,5	27-35	54	52.0	10.0	5
53113570	63 x 1,5	34-45	67	61.3	15.0	5
SKINTOP® COLD-R						
53113600	12 x 1,5	1-5	16	26.5	6.5	100
53113610	16 x 1,5	2-7	20	32.0	7.0	100
53113620	20 x 1,5	5-10	24	35.5	8.0	50
53113630	25 x 1,5	6-13	29	37.5	8.0	25
53113640	32 x 1,5	7-15	36	42.2	9.0	25
53113650	40 x 1,5	15-23	45	49.5	9.0	10
53113660	50 x 1,5	22-29	54	52.0	10.0	5
53113670	63 x 1,5	28-39	67	61.3	15.0	5