


SKINTOP® BS

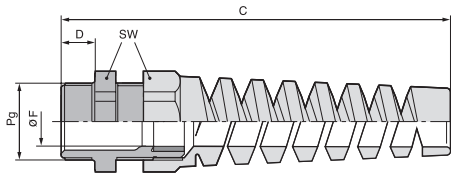

SKINTOP® BS

Benefits

- Reliable bending and antikink protection
- Conservation
- Functional reliability
- To protect flexible cables

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- Robotics industry
- Light and sound applications
- Flexing machine parts

Approvals (Norm references)



Design

- PG connection thread

Note



- For suitable accessories see SKINTOP® accessories PG
- Counter nut to be used SKINTOP® GMP-GL
- Version with reducing insert to seal smaller cable cross-sections SKINTOP® BSR on request

Technical data

- Caution**
Installation dimensions and tightening torques see Appendix T21
- RAL Colour delivered**
RAL 7001 silver-grey
RAL 9005 black / UV resistant
- Material**
Body: Polyamide
Seal: CR
- IP Degree of protection**
IP 68 - 5 bar
- Range of temperature**
-20 °C up to +80 °C

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® BS silver grey						
53015600	BS 7	2,5 - 6,5	15	62.0	8.0	100
53015610	BS 9	3,5 - 8	19	73.5	8.0	100
53015620	BS 11	4 - 10	22	86.0	8.0	100
53015630	BS 13,5	6 - 12	24	98.0	9.0	50
53015640	BS 16	9 - 14	27	111.5	10.0	25
53015650	BS 21	13 - 18	33	129.0	11.0	25
SKINTOP® BS black						
53015800	BS 7	2,5 - 6,5	15	62.0	8.0	100
53015810	BS 9	3,5 - 8	19	73.5	8.0	100
53015820	BS 11	4 - 10	22	86.0	8.0	100
53015830	BS 13,5	6 - 12	24	98.0	9.0	50
53015840	BS 16	9 - 14	27	111.5	10.0	25
53015850	BS 21	13 - 18	33	129.0	11.0	25

SKINTOP® BT

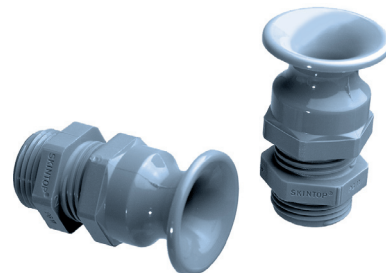

SKINTOP® BT

Benefits

- Reliable bending and antikink protection
- Conservation
- Functional reliability

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- Apparatus construction
- Light and sound applications
- Flexing machine parts

Approvals (Norm references)



Design

- PG connection thread

Note

- For suitable accessories see SKINTOP® accessories PG
- Counter nut to be used SKINTOP® GMP-GL

Technical data

- Caution**
Installation dimensions and tightening torques see Appendix T21
- RAL Colour delivered**
RAL 7001 silver grey
- Material**
Body: Polyamide
Seal: CR
- IP Degree of protection**
IP 68 - 5 bar
- Range of temperature**
-20 °C up to +80 °C

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINTOP® BT silver grey						
53015410	9	3,5 - 8	19	42.9	8.0	100
53015420	11	4 - 10	22	47.7	8.0	100
53015430	13,5	5 - 12	24	52.0	9.0	50
53015440	16	9 - 14	27	55.9	10.0	50
53015450	21	13 - 18	33	64.4	11.0	50