


SKINDICHT® SVFK

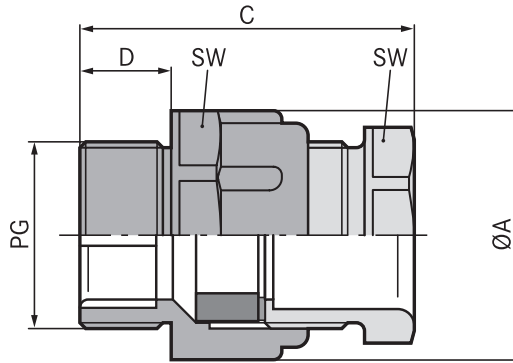

SKINDICHT® SVFK

Benefits

- Economic type
- Lateral sealing lips fit automatically around various cable dimensions
- Cable-specific seal dimensions are no longer necessary
- Dimensional adaptability
- Large clear opening allows clamping of up to two flat cables

Application range

- For inserting of flat cables.
- Conveyor systems
- Pumps
- Elevators
- Switch cabinet building

Approvals (Norm references)



Design

- PG connection thread

Note

- Counter nut to be used SKINDICHT® GMK
- For suitable flat cables, see ÖLFLEX® LIFT F for indoor applications or ÖLFLEX® CRANE F for outdoor applications

Technical data

- Caution**
Installation dimensions see Appendix T21
- Colour delivered**
RAL 7035 light grey
- Material**
Body: Polystyrene
Special sealing insert: CR
- Degree of protection**
IP 54
- Range of temperature**
-20°C up to +60°C

Part number	Part designation / size	Flat cable width min./max.	Min./ max. cable thickness in mm	SW1 / SW2 mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINDICHT® SVFK							
52005470	SVFK 16	-- 15.0	-- 5.0	27 / 23	39.5	10.0	25
52005680	SVFK 21	10.0 - 20.5	3.0 - 8.0	32 / 30	43.0	11.0	25
52005690	SVFK 29	15.0 - 27.0	4.0 - 11.5	42 / 41	45.0	11.0	25
52005700	SVFK 36	25.0 - 34.0	4.0 - 11.5	53 / 50	51.0	13.0	10
52005710	SVFK 42	30.0 - 40.0	5.0 - 12.0	60 / 55	54.0	13.0	5
52005720	SVFK 48	35.0 - 45.0	5.0 - 12.0	65 / 60	55.0	15.0	5