
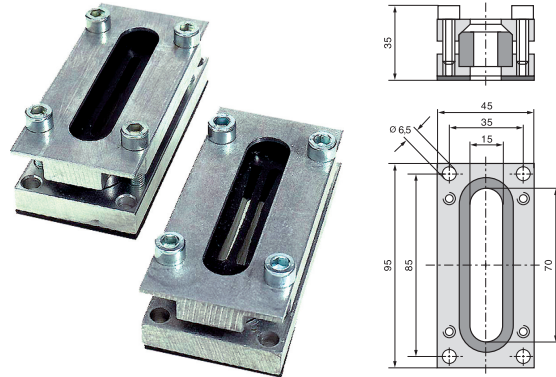


SKINDICHT® FL

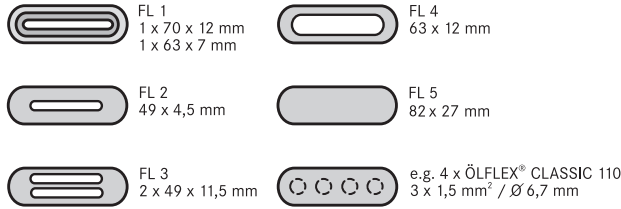

SKINDICHT® FL

Benefits

- The seal profiles enable many problems to be solved
- Several flat and round cables can be fed through
- Through the conical internal contour in the upper part of the housing the sealing inserts are pressed on to the cable

Application range

- Mainly used for large flat cables.
- Elevators
- Conveyor systems
- Crane building
- Power chains

Approvals (Norm references)



Note

- When assembled professionally and properly, the protection class IP 65 can be reached
- For suitable flat cables, see ÖLFLEX® LIFT F for indoor applications or ÖLFLEX® CRANE F for outdoor applications

Technical data

- Material**
Body: Aluminium, special untreated alloy
Screws and spring washers: Zinc plated steel
Seal: NBR
- Degree of protection**
IP 65
- Range of temperature**
-20°C up to +100°C

Part number	Part designation / size	Cable pass length x width mm	Dimension: L x W x H in mm	Pieces / PU
SKINDICHT® FL				
52008010	FL 1	70 x 15 + 63 x 7	45 x 35 x 95	1
52008020	FL 2	49 x 4,5	45 x 35 x 95	1
52008030	FL 3	49 x 4,5 + 49 x 4,5 (49 x 11,5)	45 x 35 x 95	1
52008040	FL 4	63 x 12,0 (+0,2)	45 x 35 x 95	1
52008050	FL 5	70 x 15	45 x 35 x 95	1