


SKINDICHT® SR

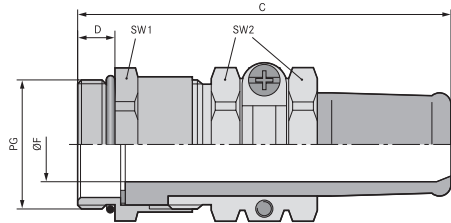

SKINDICHT® SR

Benefits

- Reliable bending and antikink protection
- High strain relief
- Robust
- For cables with large outer diameters
- High degree of protection

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- Movable machinery
- Building sites
- Flexing machine parts

Approvals (Norm references)



Design

- PG connection thread

Note

- Counter nut to be used SKINDICHT® SM
- EMC type please see SKINDICHT® SRE

Technical data

- Caution**
Installation dimensions see Appendix T21
- On request**
Available with long connection thread
- Material**
Body: Nickel plated brass
O-ring: NBR
Antikink protection: CR
- Degree of protection**
IP 65
- Range of temperature**
-20°C up to +80°C

Part number	Part designation / size	Clamping range ØF mm	Max. fitting size for installation in mm	SW1 / SW2 mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINDICHT® SR							
52000990	SR 07/05	3,5 - 5	23	14 / 15	50,0	5,0	50
52001000	SR 09/07	5,5 - 7	25	17 / 17	52,0	6,0	50
52001010	SR 11/07	5,5 - 7	28	20 / 20	56,0	6,0	25
52001020	SR 11/09	7,5 - 9	28	20 / 20	56,0	6,0	25
52001030	SR 13/09	7,5 - 9	32	22 / 22	62,0	6,5	25
52001040	SR 13/11	9 - 11	32	22 / 22	62,0	6,5	25
52001050	SR 13/13	11 - 13	32	22 / 22	62,0	6,5	25
52001060	SR 16/13	11,5 - 13	35	24 / 24	67,0	6,5	25
52001070	SR 16/15	13 - 15	35	24 / 24	67,0	6,5	25
52001080	SR 21/15	13,5 - 15	46	30 / 30	79,0	7,0	25
52001090	SR 21/17	15 - 17	46	30 / 30	79,0	7,0	25
52001100	SR 21/19	17 - 19	46	30 / 30	79,0	7,0	25
52001110	SR 21/20	18 - 20	46	30 / 30	79,0	7,0	25
52001120	SR 29/20	18 - 20	59	40 / 41	91,0	8,0	10
52001130	SR 29/23	21 - 23	59	40 / 41	91,0	8,0	10
52001140	SR 29/25	23 - 25	59	40 / 41	91,0	8,0	10
52001150	SR 36/26	23 - 26	70	50 / 50	110,0	9,0	5
52001160	SR 36/30	27 - 30	70	50 / 50	110,0	9,0	5
52001170	SR 36/33	30 - 33	70	50 / 50	110,0	9,0	5
52001180	SR 36/35	32 - 35	70	50 / 50	110,0	9,0	5
52001190	SR 42/35	32 - 35	75	57 / 57	114,0	10,0	5
52001200	SR 42/38	35 - 38	75	57 / 57	114,0	10,0	5
52001210	SR 42/40	36 - 40	75	57 / 57	114,0	10,0	5
52001220	SR 48/40	36 - 40	83	64 / 64	119,0	10,0	1
52001230	SR 48/44	40 - 44	83	64 / 64	119,0	10,0	1