


SKINDICHT® SR-SV

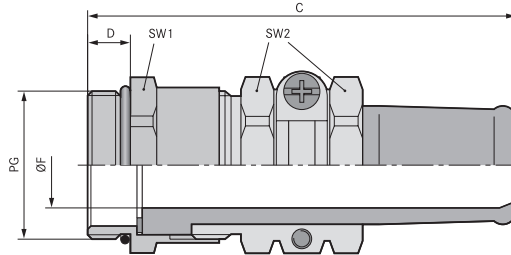

SKINDICHT® SR-SV

■ Benefits

- For high temperatures
- Resistant against oils, solvents, acids and chemicals
- Seawater-resistant
- High strain relief
- Robust

■ Application range

- Special cable gland with VITON® antikink sleeve. Our own reinforced acid-resistant VITON® receptacle does not show an aging effect even after a long usage period at a temperature of +165°C.
- Machine and turbine manufacturing
- Plant construction
- Laboratory

■ Approvals (Norm references)



■ Design

- PG connection thread

■ Note

- Counter nut to be used SKINDICHT® SM
- EMC type on request

■ Technical data

- Caution**
Installation dimensions see Appendix T21
- On request**
Available with long connection thread
- Material**
Body: Nickel plated brass
O-ring: FKM
Antikink protection: FKM
- Degree of protection**
IP 65
- Range of temperature**
-15°C up to +165°C

Part number	Part designation / size	Clamping range ØF mm	Max. fitting size for installation in mm	SW1 / SW2 mm	Overall length C mm	Thread length D mm	Pieces / PU
SKINDICHT® SR-SV							
52023620	SR-SV 11/07	5,5 - 7	28	20 / 20	56.0	6.0	25
52023621	SR-SV 11/09	7,5 - 9	28	20 / 20	56.0	6.0	25
52023622	SR-SV 13/09	7,5 - 9	32	22 / 22	62.0	6.5	25
52023623	SR-SV 13/11	9 - 11	32	22 / 22	62.0	6.5	25
52023624	SR-SV 13/13	11 - 13	32	22 / 22	62.0	6.5	25
52023625	SR-SV 16/13	11,5 - 13	35	24 / 24	67.0	6.5	10
52023626	SR-SV 16/15	13 - 15	35	24 / 24	67.0	6.5	10
52023627	SR-SV 21/15	13,5 - 15	40	30 / 30	79.0	7.0	10
52023628	SR-SV 21/17	15 - 17	46	30 / 30	79.0	7.0	10
52023629	SR-SV 21/19	17 - 19	46	30 / 30	79.0	7.0	10

Viton® is a registered trademark of DuPont de Nemours