


**SKINDICHT® CN**

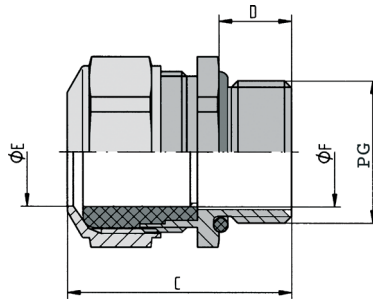

SKINDICHT® CN

**Benefits**

- For high temperatures
- Resistant against oils, solvents, acids and chemicals
- Sea water resistant
- For high mechanical stress
- Increased corrosion resistance

**Application range**

- Chromium nickel steel cable gland with VITON® seal, specially designed for use under tough conditions.
- Pharmaceutical, petrochemical industry
- Off shore
- Wind energy systems
- Brickyard

**Approvals (Norm references)**



**Design**

- PG connection thread

**Note**

- Suitable counter nut SKINDICHT® SM CrNi please see chart

**Technical data**

- Caution**  
Installation dimensions see Appendix T21
- On request**  
TPE seal
- Material**  
Body: Chrome-nickel steel in accordance with DIN, material no. 1.4305  
Seal: FPM  
O-ring: FPM
- Degree of protection**  
IP 68
- Range of temperature**  
-25 °C up to +200 °C

Part number	Part designation / size	Clamping range ØF mm	SW mm	Overall length C mm	Thread length D mm	Pieces / PU
<b>SKINDICHT® CN</b>						
52032520	CN 9	6 - 10	18	28.0	10.0	5
52032525	CN 11	5 - 12	22	32.0	10.0	5
52032540	CN 13,5	8 - 15	24	34.0	10.0	5
52032550	CN 16	8 - 15	24	34.0	10.0	5
52032560	CN 21	12,5 - 20,5	30	42.0	12.0	5
52032570	CN 29	19 - 27,5	41	53.0	12.0	5

Viton® is a registered trademark of DuPont de Nemours