


## SKINDICHT® GMK

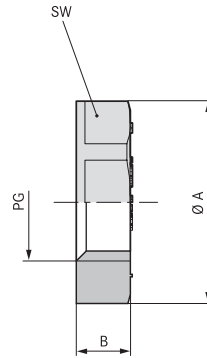

### SKINDICHT® GMK

■ **Benefits**

- Bearing surface avoids scratchings on the housing while mounting with an wrench

■ **Application range**

- For locking of SKINDICHT® cable glands in boreholes without thread.

■ **Approvals (Norm references)**



■ **Design**

- PG connection thread

■ **Note**

- For high tightening torques and mechanical stability we refer to SKINTOP® GMP-GL counter nuts

■ **Technical data**

<b>RAL</b>	<b>Colour delivered</b> RAL 7035 light grey
	<b>Material</b> Polystyrene
	<b>Range of temperature</b> -20°C up to +70°C

Part number	Part designation / size	B in mm	SW mm	Pieces / PU
<b>SKINDICHT® GMK</b>				
52000110	GMK 7	5	19	100
52000120	GMK 9	5	22	100
52000130	GMK 11	5	24	100
52000140	GMK 13,5	6	27	100
52000150	GMK 16	6	30	100
52000160	GMK 21	7	36	50
52000170	GMK 29	7	46	50
52000180	GMK 36	8	60	25
52000190	GMK 42	8	65	25
52000200	GMK 48	8	70	25