


SKINDICHT® BLK / BLK-GL

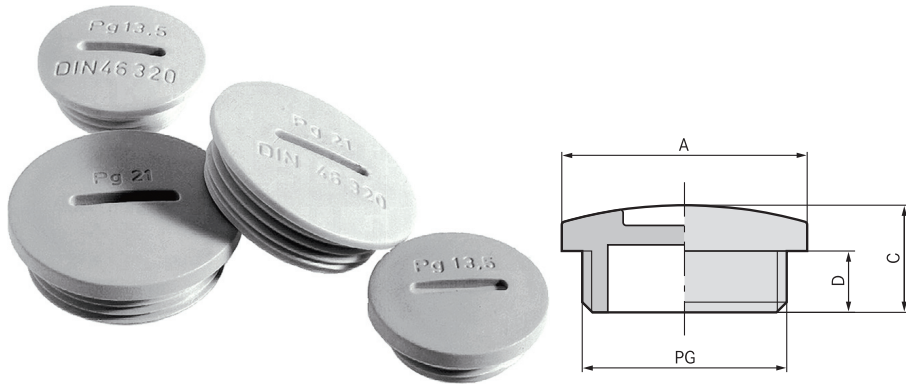

SKINDICHT® BLK / BLK-GL

Benefits

- Used wherever threads previously cut must be closed

Application range

- Switch cabinet building
- Junction box
- Connection box

Approvals (Norm references)



Design

- PG connection thread

Note

- SKINDICHT® BLK-GL offers high stability due to glass fibre reinforcement

Technical data

- i** On request
With O-ring
- RAL** Colour delivered
RAL 7035 light grey
- Material**
BLK: polystyrene
BLK-GL: polyamide glass fibre reinforced
- Temperature**
Range of temperature
BLK: -20°C up to +70°C
BLK-GL: -40°C up to +100°C

Part number	Part designation / size	Thread length D mm	Pieces / PU
SKINDICHT® BLK			
52005949	BLK 7	6.0	100
52005950	BLK 9	6.0	100
52005960	BLK 11	6.0	100
52005970	BLK 13,5	6.0	100
52005980	BLK 16	6.0	100
52005990	BLK 21	8.0	50
52006000	BLK 29	8.0	50
52006010	BLK 36	10.0	25
52006020	BLK 42	10.0	25
52006030	BLK 48	12.0	25
SKINDICHT® BLK-GL			
52024848	BLK - GL 7	6.0	100
52024849	BLK - GL 9	6.0	100
52024850	BLK - GL 11	6.0	100
52024851	BLK - GL 13,5	6.0	100
52024852	BLK - GL 16	6.0	100
52024853	BLK - GL 21	8.0	50
52024854	BLK - GL 29	8.0	50
52024855	BLK - GL 36	10.0	25
52024856	BLK - GL 42	10.0	25
52024857	BLK - GL 48	12.0	25